

# 3000 HT

Solar Screen



TEXTSTYLE



## 3000 HT

Our 3000 HT Solar Screen fabric offers a stylish and modern aesthetic for window treatments that minimize the negative effects of the sun, while preserving outward visibility.

3000 HT's broken twill offers customers a solution where white is always facing out, giving the fabric superior reflective properties regardless of the color facing the room.


### FEATURES

- White colored back optimizes solar reflectance
- Provides exterior color uniformity
- A unique manufacturing process delivers technically superior fabrics that are backed by a limited lifetime warranty
- Environmentally friendly and safe
- Flame Retardant
- Available in two openness factors - 3%, 5%
- Available in 6 modern colors
- Versatile – can be used in roller shades and panel track applications


### COLORS




HT01 WHITE/WHITE

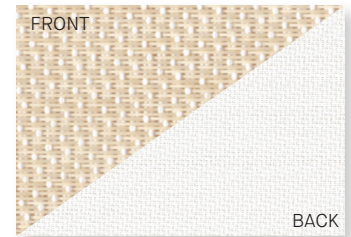


HT02 WHITE/BEIGE




HT03 WHITE/LIGHT GRAY

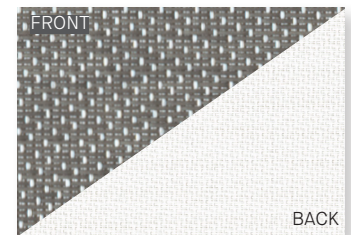

HT04 WHITE/DIM GRAY



HT08 WHITE/BRONZE

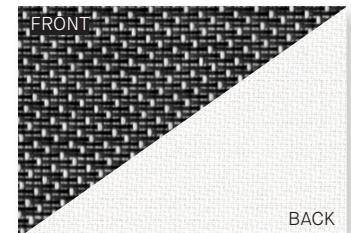

HT09 WHITE/CHARCOAL

Bringing Fabrics to Life

USA | AUSTRALIA | EUROPE [textstyle.com](http://textstyle.com)



Walker Specialties, Inc.  
50 Messina Drive  
Braintree, MA 02184  
617-333-3220  
[info@walkerspecialties.com](mailto:info@walkerspecialties.com)




©2022 Textstyle

[www.walkerspecialties.com](http://www.walkerspecialties.com)

# 3000 HT

Solar Screen



TEXTSTYLE

## SPECIFICATIONS

	3%	5%
Composition	25% Polyester, 75% PVC	
Openness	Average 3%	Average 5%
Weight	12.24oz/yd <sup>2</sup> (415 g/m <sup>2</sup> )	11.65oz/yd <sup>2</sup> (395 g/m <sup>2</sup> )
Thickness	0.024 in (.60mm)	0.026 in (.66mm)
Light Fastness	Grade 8 (Blue Wool Scale)	
Average length	33 yd (30m)	
Width	98.4" (2.5m)	
Cutting	Cold Cutting and Ultrasonic Cutting	
Welding	248°F (120°C) to 284°F (140°C), test first	
Railroadable	No	
Cleaning	Wipe clean with warm soapy water and damp cloth.	
Environmental Standards	GREENGUARD Gold, Low VOC <0.5mg/m <sup>3</sup> : CDPH Standard Method v1.1-2010, Health Product Declaration, OEKO-TEX Standard 100, ISO 14001	
Fire Classifications	NFPA 701, CA Title 19	

## ACOUSTICAL PERFORMANCE

3000 HT	NRC RATING*	SAA RATING*
3%	0.15	0.15
5%	0.10	0.09

\*Noise Reduction Coefficient (NRC) and Sound Absorption Average (SAA) tested to ASTM C423-17

# 3000 HT

Solar Screen



## THERMAL AND OPTICAL FACTORS

COLOR	THERMAL FACTORS						OPTICAL FACTORS	
	Ts	Rs	As	Shading Coefficient			Tv	
				1/8" CL	1/4" CL	1/4" HA		
3%	HT01 White/White - Both Sides	20	64	16	0.36	0.36	0.33	14
	HT02 White/Beige	16	59	25	0.38	0.38	0.34	10
	Dark Side	16	53	31	0.43	0.42	0.36	10
	HT03 White/Light Gray	14	54	32	0.41	0.41	0.36	9
	Dark Side	14	42	44	0.50	0.48	0.40	9
	HT04 White/Dim Gray	9	46	45	0.46	0.45	0.38	6
	Dark Side	9	23	68	0.62	0.59	0.45	6
	HT08 White/Bronze	4	42	54	0.47	0.46	0.38	4
	Dark Side	4	13	83	0.67	0.64	0.48	4
	HT09 White/Charcoal	3	40	57	0.49	0.47	0.39	3
	Dark Side	3	10	87	0.69	0.66	0.49	3
	5%	HT01 White/White - Both Sides	25	63	12	0.39	0.38	0.35
HT02 White/Beige		19	62	19	0.41	0.40	0.36	15
Dark Side		19	54	27	0.46	0.45	0.38	15
HT03 White/Light Gray		16	56	28	0.45	0.44	0.38	10
Dark Side		16	45	39	0.53	0.50	0.44	10
HT04 White/Dim Gray		13	44	43	0.50	0.49	0.40	8
Dark Side		13	27	60	0.64	0.62	0.49	8
HT08 White/Bronze		6	46	48	0.42	0.40	0.34	7
Dark Side		6	15	79	0.63	0.61	0.44	6
HT09 White/Charcoal		6	41	53	0.54	0.51	0.45	5
Dark Side		6	13	81	0.73	0.69	0.51	5



Bringing Fabrics to Life  
USA | AUSTRALIA | EUROPE [textstyle.com](http://textstyle.com)

**WALKER SPECIALTIES**  
Walker Specialties, Inc.  
50 Messina Drive  
Braintree, MA 02184  
617-333-3220  
[info@walkerspecialties.com](mailto:info@walkerspecialties.com)

**ROLLEASE ACMEDA**  
©2022 Textstyle

[www.walkerspecialties.com](http://www.walkerspecialties.com)